



# Power Distribution Board (PDB)



II 2 G D



The JCE range of Distribution Boards are intended for use in areas made potentially hazardous by the presence of flammable liquids, gases or vapours (Zone 1 and Zone 2). Certified for Group IIB or IIB + H<sub>2</sub> locations.

All enclosures are chromate primed and polyester powder coated for increased protection against corrosion in hostile environments.

Distribution Boards are custom built to suit specific requirements and can range from 2 Way to 60 Way.

Amperages range from 6 Amp to 63 Amp.

## Materials and Finish

Body & Cover	Aluminium alloy EN AC-42000 (LM25) to BS EN 1706 :1998 with less than 0.2% copper content.
	EJBX2 only –Cast Iron to BS1452 Grade 14
Cover Bolts	Stainless steel (18/8)
Mounting Plate	Mild steel zinc plated (passivated)
Finish	Natural. A corrosion finish is also available, see options.

## Earthing

All enclosures are supplied with a 6mm stainless steel (18/8) internal and external earth stud as standard. Larger internal earths can be fitted on request.


## Entries and Thread Standards

Each side of an enclosure will accommodate a varying number of tapped entries. Please provide a sketch indicating enclosure required with size and location of each entry. Standard thread forms available are ISO Metric M20-M90 or 1/2" - 3" NPT.

## Protection Grade

Style 'A' flat lid enclosures incorporate a gasket providing Ingress Protection to IP66. All other enclosures are rated IP54, but can be increased to IP66 with the application of Hylomar PL32/M. Application of a non hardening grease to flamepaths and entries is recommended.

## Typical Dimension EExd Distribution Enclosure

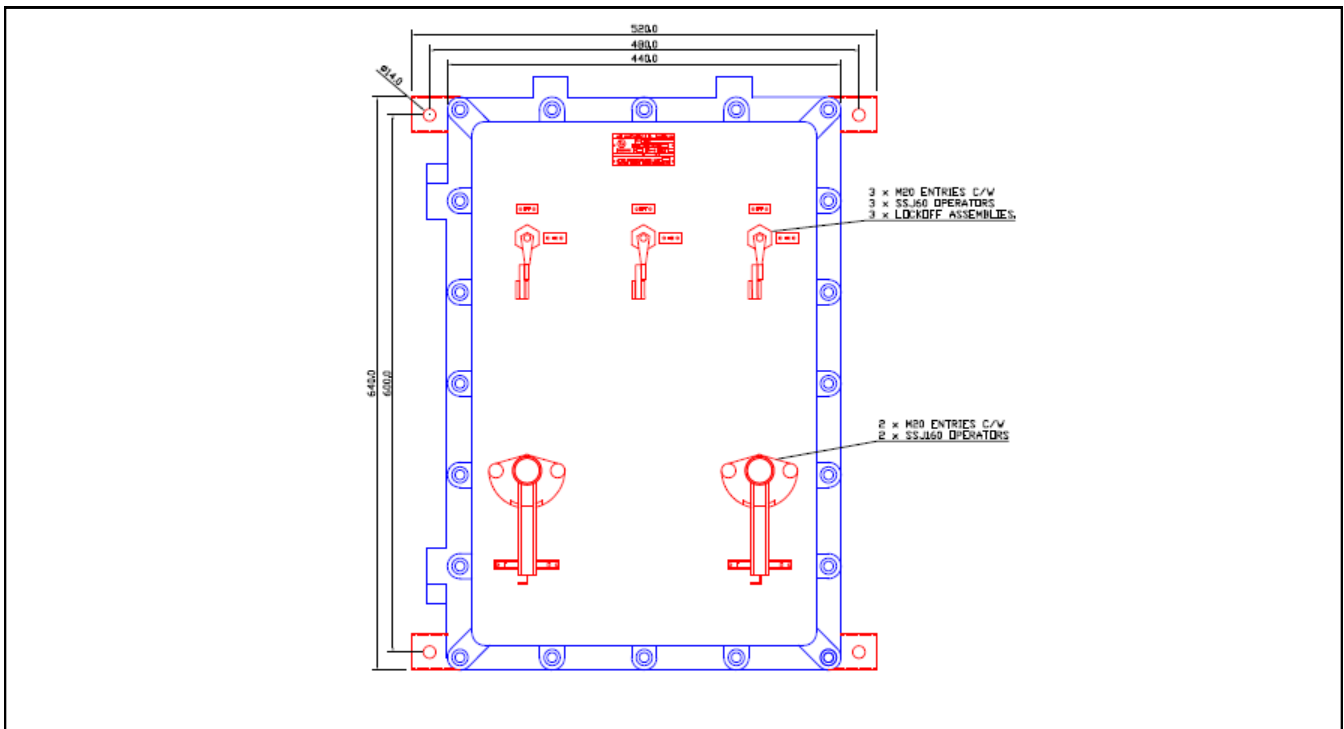

## Specifications

### Options

Hinges available EJB3A, 4A and 5A only, specify long or short side. Fitted as standard on EJBS1, EJBS2 and EJBX2. Chromate primed and polyester powder coated for added protection against corrosion - available on request.  
Mounting Brackets available on request.

### Certification

Terminal Enclosures-ISSeP03ATEX028  
Control Enclosures-ISSeP03ATEX029/ISSeP05ATEX077X  
EExd IIB T6/Exd IIB + H2 T6



JCE Group (UK) Ltd, Blackburn Business Park, Aberdeen, AB21 0PS  
Tel. +44 (0) 1224 798600 Fax +44 (0) 1224 798601  
E-Mail: info@jcegroup.com

JCE (Europe) Ltd., East Way, Lee Mill Industrial Estate, Ivybridge, Devon, PL21 9LL  
Tel. +44 (0) 1752 690530 Fax +44 (0) 1752 690531  
E-Mail: info@jcegroup.com

\* Electrical values under standard test conditions(STC): irradiation of 1000 W/m<sup>2</sup>, air mass AM 1.5 and all temperature of 25 °C

\*\* Electrical values under normal operating all temperature (NOCT): irradiation of 800 W/m<sup>2</sup>, air mass AM 1.5 wind speed 1m/s and ambient temperature of 20 °C

\*\*\* 10 year or 90% of the minimally specified power P under standard test conditions (STC)

\*\*\*\* 20 years on 80% of the minimally specified power P under standard test conditions (STC)